

CB ANTENNA AND ATTACHMENT

Accessory Name	Parts Number	Application Model	Issue Date	Publication No.
CB ANTENNA AND ATTACHMENT	08E70-MKC-L00	GL1800/D	February 2025	MII 55305

Introduction







ALL INFORMATION, ILLUSTRATIONS, DIRECTIONS AND SPECIFICATIONS INCLUDED IN THIS PUBLICATION ARE BASED ON THE LATEST PRODUCT INFORMATION AVAILABLE AT THE TIME OF APPROVAL FOR PRINTING. Honda Motor Co., Ltd. RESERVES THE RIGHT TO MAKE CHANGES AT ANY TIME WITHOUT NOTICE AND WITHOUT INCURRING ANY OBLIGATION WHATSOEVER. NO PART OF THIS PUBLICATION MAY BE REPRODUCED WITHOUT WRITTEN PERMISSION. THIS MANUAL IS WRITTEN FOR PERSONS WHO HAVE ACQUIRED BASIC KNOWLEDGE OF MAINTENANCE ON Honda MOTORCYCLES, MOTOR SCOOTERS, ATVS OR SXSS.

Honda Dealer:
Please give a copy of these instructions to your customer.

Customer:
Because the installation of this accessory requires specialized knowledge, special tools and equipment, it is recommended to only install it at a dealer with qualified technicians.

How To Read These Symbols

Your safety, and the safety of others, is very important. To help you make informed decisions we have provided safety messages and other information throughout this manual.

-  **WARNING** You CAN be KILLED or SERIOUSLY HURT if you don't follow instructions.
-  **CAUTION** You CAN be HURT if you don't follow instructions.
-  **NOTICE** The purpose of this message is to help prevent damage to your vehicle, other property, or the environment.
-  **NOTE** Things you want to know, things that are useful to know.
-  Follow the instructions of the Service Manual.
-  Follow the other symbol instructions of the "Installation Instructions BASIC".

Other Instruction Symbols

The symbols used throughout these instructions show specific "Warnings and Notices". Refer to the "Basic Shop Manual" for the description of each symbol.

INFORMATION

CAUTION

- To prevent burns, allow the engine, exhaust system, radiator, etc., to cool before installing the accessory.


NOTICE

- Take care not to damage the painted surfaces of the motorcycle.

NOTE:

- Reinstall the removed parts on the motorcycle and make sure that the wires and harnesses are not pinched.
- Disconnect the negative (-) cable from the battery before installing this accessory.
- Trim the excess ends off the wire ties after attaching them to the wire harnesses. Do not allow the cut part of the wire tie to interfere with another harness or brake hose.
- After reconnecting the battery, refer to the motorcycle *Owner's Manual* and set the meter.
- After this accessory installation, check the lights (e.g. right/left turn signal lights and brake lights) for proper operation.
- Setting is necessary after installing this accessory
- Save all removed parts unless otherwise indicated.

TORQUE INFORMATION

Refer to the Service Manual for the torque values including standard torque of the removed parts. ()

PARTS LIST

When the instruction manual and installation instructions are included in this kit, be sure to give them to the customer.

<CB ANTENNA AND ATTACHMENT>

Component	No.	Parts Name	Qty	Parts No.
	(1)	CB antenna assembly	1	-
	(2)	Antenna stay	1	-
	(3)	Wire tie (W x L: 7 x 125 mm)	2	90652-KT1-771
	(4)	6 x 42 mm socket bolt	2	-
	(5)	6 x 22 mm socket bolt	1	90085-KFB-000
	(6)	Cushion tape	1	-
	(7)	Flange collar	2	18423-MGS-D30
	(8)	Rubber cushion	2	-

<CB RADIO AND ATTACHMENT>

Component	No.	Parts Name	Qty	Parts No.
<p>For the installation, refer to the Installation Instructions of accessory.</p>	(9)	CB main unit	1	-
	(10)	FCC rule book	1	-
	(11)	Sub harness	1	-
	(12)	Unit cover	1	-
	(13)	5 x 12 mm tapping screw	7	90121-MJK-N20
	(14)	81 x 4.5 O-ring	1	91315-MA6-003
	(15)	Wire tie (W x L: 7 x 165 mm)	2	90651-KV6-003
	(16)	7.5 mm clip	2	-
	(17)	4 x 100 mm clip	1	94591-41000
	(18)	4 x 8 mm tapping screw	1	93903-24180

INSTALLATION

1. Refer to the Service Manual for motorcycle, remove the motorcycle parts as shown. (📖)

Step 5

Step 4

Step 3 (Right side)

Open the lid. (Both sides)

Step 2

Disconnect the battery (-) cable.

Step 1 (Both sides)

INSTALLATION IMAGE

<RIGHT SIDE>

2. Drill at the factory marked point as shown.

- Remove any burrs from the edges of the holes.

<RIGHT SIDE>

ELECTRICAL DRILL (14 mm BIT)


ELECTRICAL DRILL (14 mm BIT)

TRUNK INNER LOWER BOX

ELECTRICAL DRILL (16 mm BIT)


RIGHT TRUNK SIDE COVER

3. Mark the CB antenna code and cut the cushion in dimension shown.

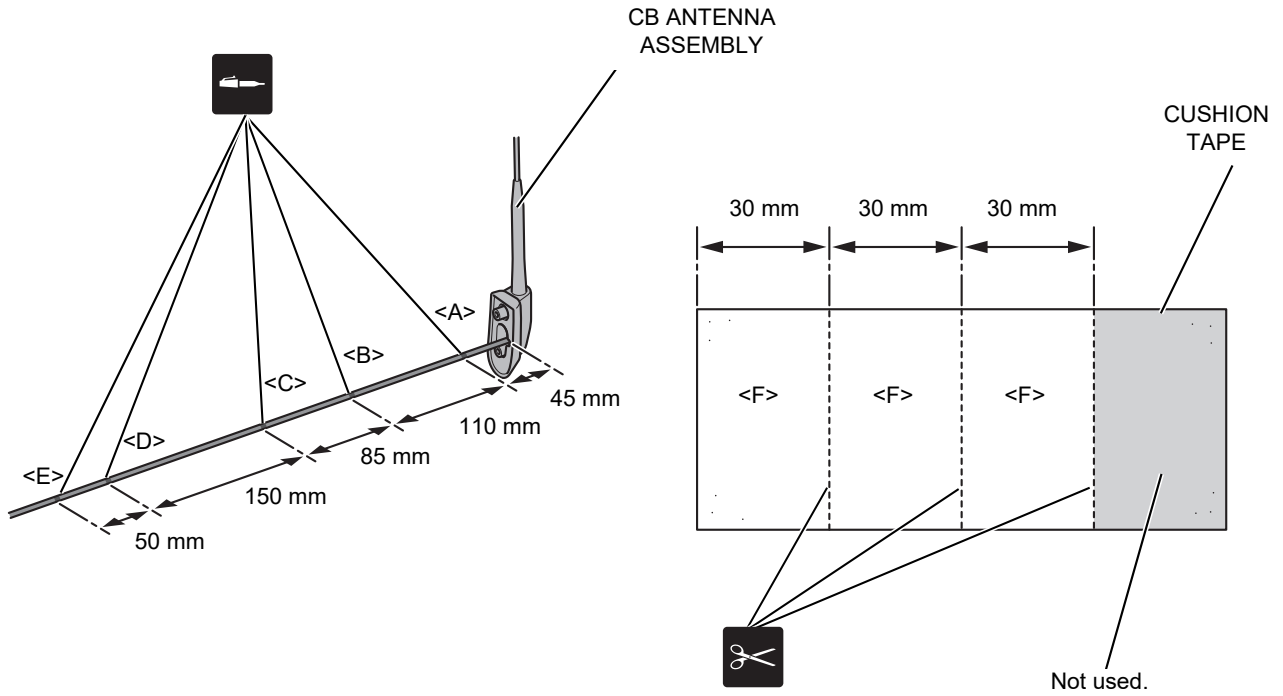


4. Temporarily install the CB antenna and secure its cable as shown.


- Thoroughly clean the area where the cut cushion tape will be attached.
- Remove the adhesive backing of the cut cushions tape before attaching.

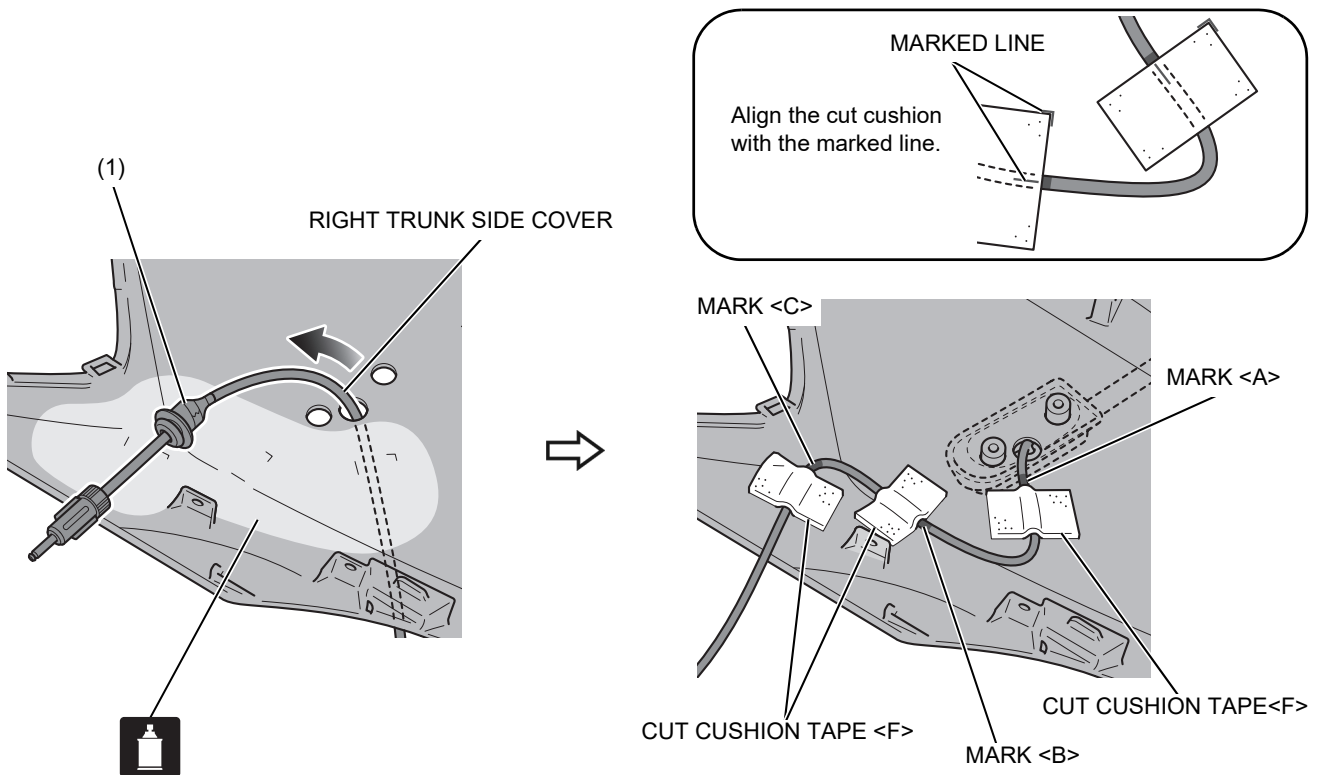

5. Route and secure the CB antenna cable as shown.
- Cut off the excess end of the wire tie, leaving a maximum of 5 mm.

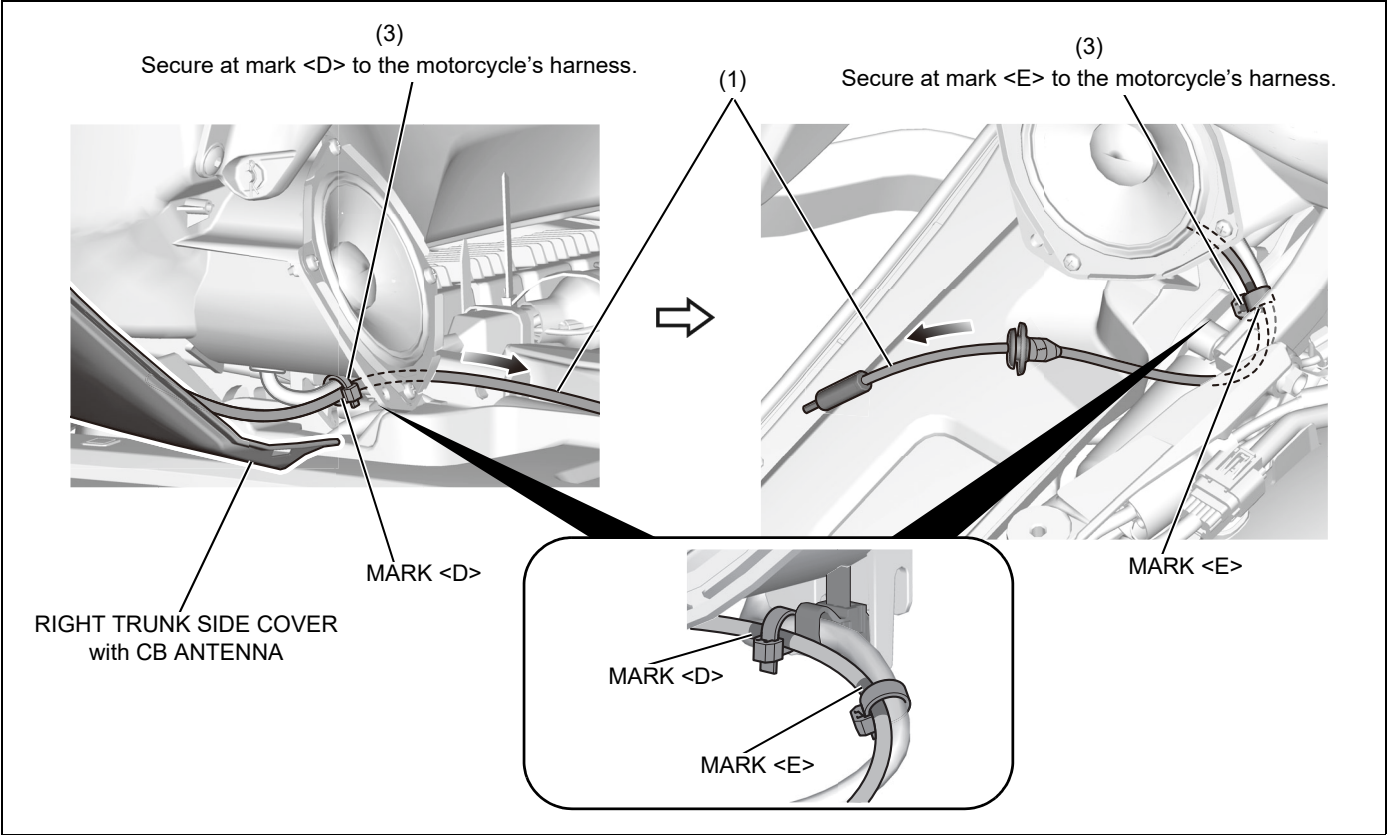


6. Install as shown.
- Thoroughly clean the area where the (8) will be attached.
 - Remove the adhesive backing of the (8) before attaching.

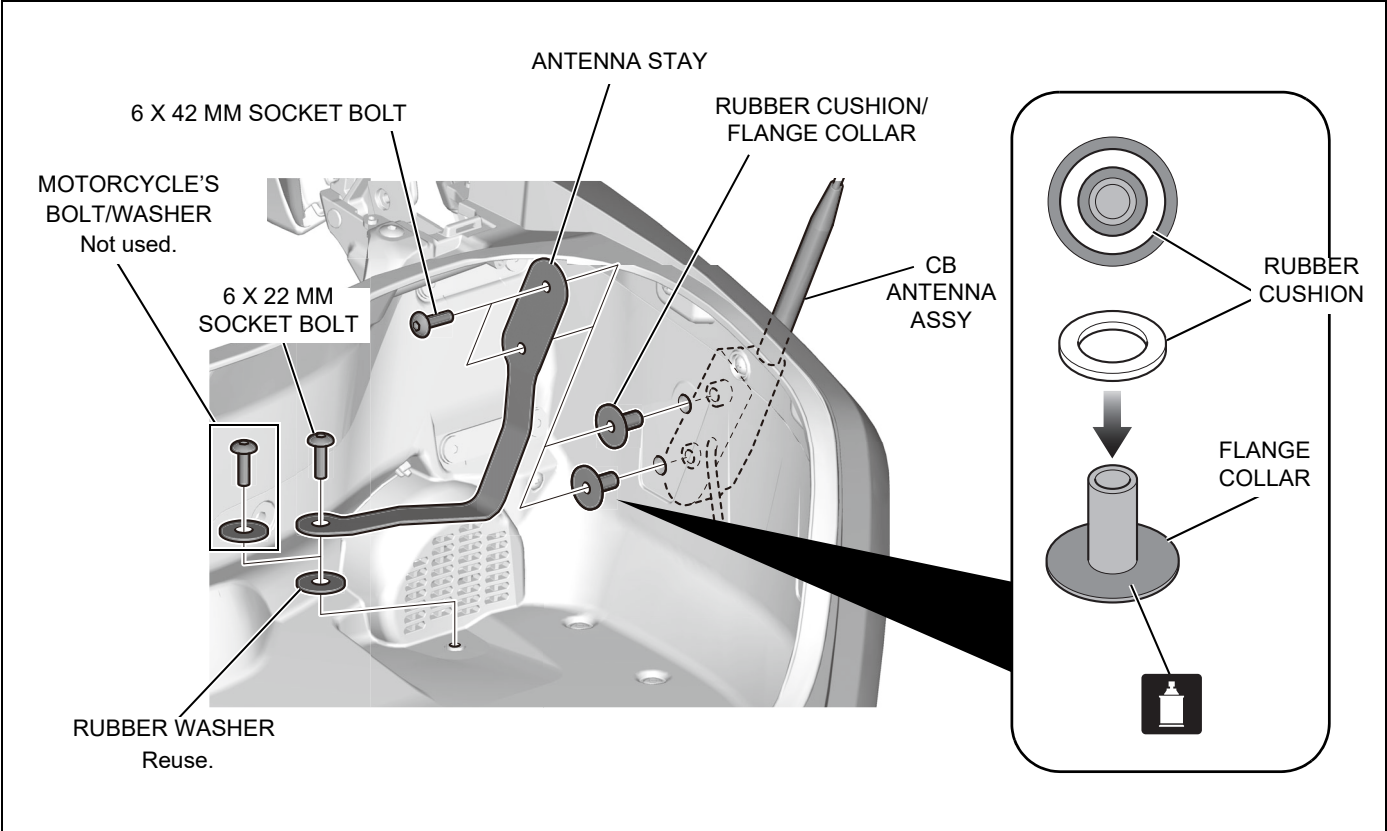

Installation Instructions

7. Install the sold separately CB radio and attachment, and then connect as shown.
- For the installation, refer to the Installation Instructions of the CB radio and attachment.
 - Apply synthetic detergent solution to the CB antenna cable as shown and then insert it into the hole securely.

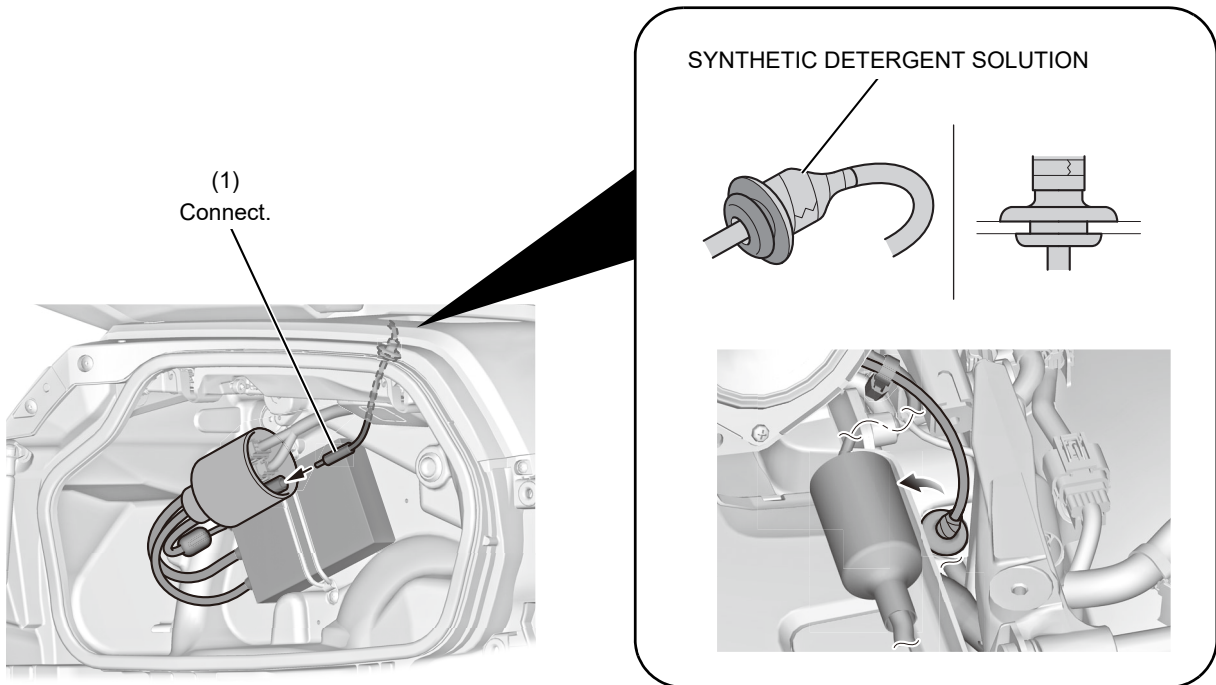

8. Follow the Installation Instructions of the CB radio and attachment, and then install the motorcycle parts in the reverse order of removal.
- Confirm that there aren't any harnesses caught or too tight.